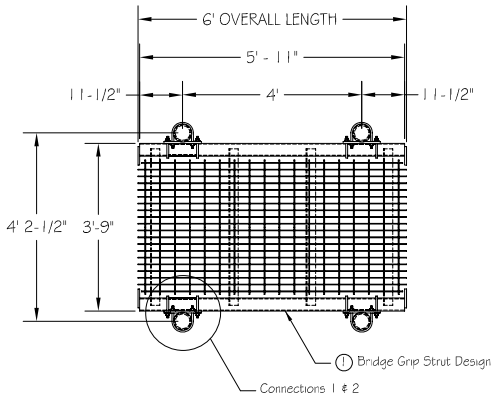

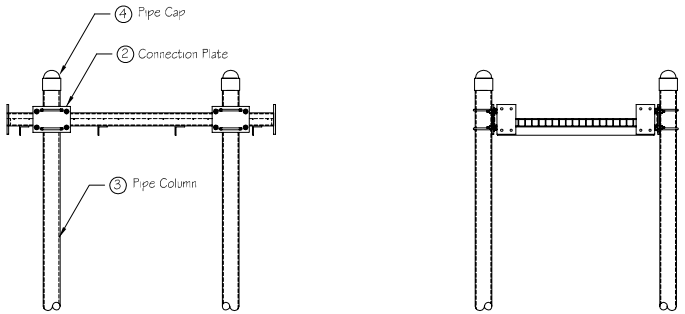

ASSEMBLY DRAWING

STEEL PARTS

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	TLB306H	6' Heavy Bridge Grip Strut Design	1
2	BTPC-01	Bridge To Pipe Column Connection Plate	4
3	PC400-80-252	4" Sch. 80 x 21' Pipe Columns	4
4 *	PC400	4" Sch. 80 Pipe Cap	4

HARDWARE

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	UB50X525	1/2" x 5-1/4" c-c x 6-1/2" isl A-36 U-Bolts	8
2	UB50X425SQ	1/2" x 4-1/4" c-c x 5-1/2" isl A-36 Sq. U-Bolts	8
3	NU050G	1/2" H.D.G. Nuts	32
4	WL050G	1/2" H.D.G. Lockwashers	32
5	WF050G	1/2" H.D.G. Flatwashers	32

** Flatwashers Are To Be Used At All Sloted Hole Locations !! **

WEIGHT & ENGINEERING INFORMATION

KIT NO.	WEIGHT (lbs.)	DESCRIPTION	CaAc (Sq. Ft.)
KHB4-306-210-02	1830	3'-9" x 6' Bridge : Four 21' Columns	N/A

Connections 1 & 2

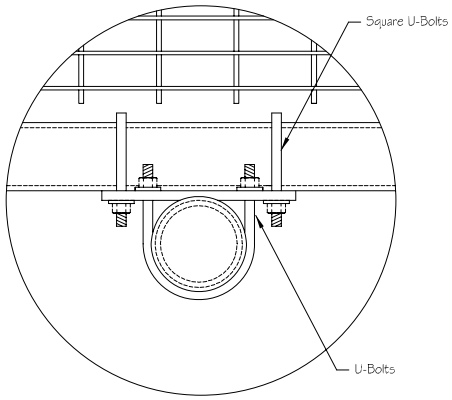

Foundation Detail

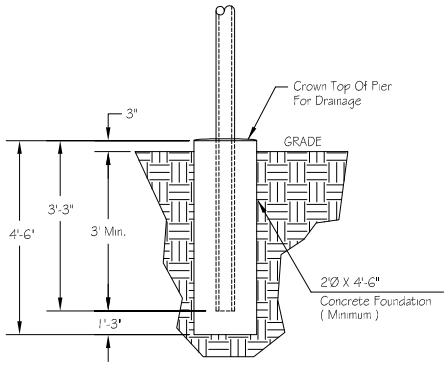

NOTES:

1.) Transmission Line Hangers Are Not Provided With This Kit !

2.) Steel Parts Indicated Above With An " * " Will Be Packed With The Hardware.

3.) The Foundation Design Provided Is Per Normal Soil Parameters Set Forth In TIA/EIA Standards. Bottom Of Foundation Must Be Extended Below The Frost Line For The Area In Which It Is To Be Installed. If Poor Soil Is Encountered, It Is Recommended That A Geotechnical Investigation Be Completed And Foundations Should Be Designed According To The Results & Recommendations Of The Geotechnical Report.

Tower Innovations
PH# (812) 853-0595
FAX# (812) 853-6652
2855 HIGHWAY 261
NEWBURGH, IN. 47630

REV. #	DESCRIPTION	DATE	APP.

DRAWN A.J.H. DATE 2-11-02
CHECK DATE
APPROVAL DATE

TITLE
3'-9" X 6' BRIDGE WITH FOUR 21' LENGTH PIPE COLUMNS

THIRD ANGLE PROJECTION

COMPANY CONFIDENTIAL. INFORMATION CONTAINED HEREIN IS CONFIDENTIAL. IT IS TO BE USED SOLELY FOR THE PURPOSE PROVIDED, AND IT IS NOT TO BE DISCLOSED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF TOWER INNOVATIONS

TOLERANCES
.X± 3/32" ANGLES± 2°
.XX± 3/32" DRILLED HOLE± #1/32"
.XXX± 1/16" BURNED HOLE± #1/16"

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN: INCHES

DWG NO. KHB4-306-210-02 REV -

DO NOT SCALE DRAWING