ASSEMBLY DRAWING



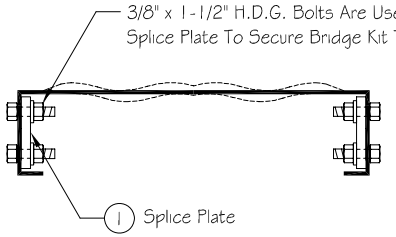

STEEL PARTS

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1*	TLB003	Pipe Backing Plate / Splice Plate	2

HARDWARE

ITEM NO.	PART NO.	DESCRIPTION	QTY.
1	BT037X150G	3/8" x 1-1/2" H.D.G. Bolt	8
2	NU037G	3/8" H.D.G. Nuts	8
3	WL037G	3/8" H.D.G. Lockwashers	8
4	WF037G	3/8" H.D.G. Flatwashers	16

** Flatwashers Are To Be Used At All Sloted Hole Locations !! **

WEIGHT & ENGINEERING INFORMATION

KIT NO.	WEIGHT (lbs.)	DESCRIPTION	CaAc (Sq. Ft.)
KTB-SPLC	3	Bridge Splice Kit For Standard Plank	N/A

NOTES:

1.) 1 Kit Is Required Per 10' Length Of Bridge For Standard Plank Bridges : (Works For 2' & 4' Wide)

2.) Steel Parts Indicated Above With An " * " Will Be Packed With The Hardware.

REV. #	DESCRIPTION	DATE	APP.

DRAWN A.J.H. DATE 6-19-00
CHECK DATE
APPROVAL DATE

THIRD ANGLE PROJECTION

COMPANY CONFIDENTIAL. INFORMATION CONTAINED HEREIN IS CONFIDENTIAL. IT IS TO BE USED SOLELY FOR THE PURPOSE PROVIDED, AND IT IS NOT TO BE DISCLOSED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF TOWER INNOVATIONS

TOLERANCES
.X± 3/32" ANGLES± 2°
.XX± 3/32" DRILLED HOLE± ø1/32"
.XXX± 1/16" BURNED HOLE± ø1/16"

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN: INCHES

Tower Innovations
PH# (812) 853-0595
FAX# (812) 853-6652
2855 HIGHWAY 261
NEWBURGH, IN. 47630

TITLE
BRIDGE SPLICE KIT FOR STANDARD PLANK

DWG NO. KTB-SPLC REV –

DO NOT SCALE DRAWING